

Chelfix EP5000 S


Epoxy Resin Based, Solvent-free, Self Levelling Coating

Product Description

Chelfix EP 5000 S, two component, epoxy resin-based, self levelling coating.

Areas of Application

- Self leveling systems for concrete surfaces exposed to medium and heavy loads such as workshops, garages and factory floors.
- Multi-storey and underground parking garage
- Sand blasting systems are recommended for wet operation field in food and beverages industries and maintenance shelters.

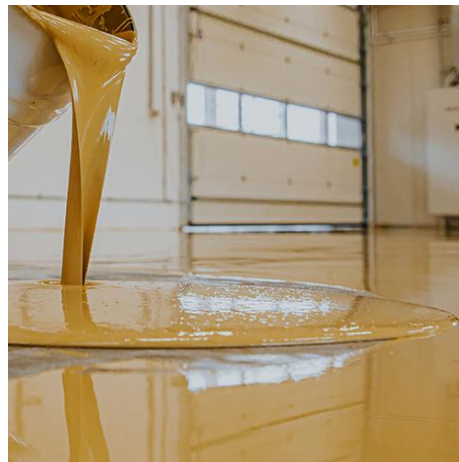

Advantages

- Can be filled with high level of filling.
- Good chemical and mechanical strength.
- Easy applicable. No solvent required.
- Economic.
- Liquid impermeable.
- Glossy finish.
- Nonskid surface can be obtained.
- Highly resistant to a variety of chemicals including chloride and sulfuric acid.

Application instructions

Surface Quality: The surface should be dry and free from all kinds of dust, dirt, weak and loose tools, cement slurry residue and grease oil. The lower surface of concrete should be clean, strong and with sufficient compression resistance (minimum 25 N/mm²) and pull-off strength at least 1.5 N/mm²

Surface Preparation: The surface should be cleaned by using appropriate methods in order to provide maximum adhesion strength.

Compound: After the component B is added to the component A, mix for 2-3 minutes with a low speed, electrical mixer (maximum 400 revolution per minute) until a homogenous color is obtained.

Application Notes / Restrictions

- Make sure that Chelfix EP 5000 S covers a continuous, non-porous surface. If necessary, apply Chelfix EP 5000 S priming coat application twice. Chelfix EP 5000 S is applied with notched rowel.
 - In order to complete the hardening of the material, do not use it allowed minimum temperature.
-

Chelfix EP5000 S

Epoxy Resin Based, Solvent-free, Self Levelling Coating

- Low temperatures will slow down the hardening, while high temperatures will accelerate the hardening. The pot life will also vary depending on the temperature.
- The product may irritate the skin. Protective glasses or gloves should be used. Protective hand cream should be used before starting work. If the soil mixture contacts with eyes, eyes should be washed immediately with warm water, and consult doctor.
- Crystallization can be shown in the product if it is kept below 0°C for a long time. If the crystals are broken by bringing the product back to room temperature, the product can be used without any problem.
- Discoloration and yellowing can be happened in the product which hardened depending on direct sunlight. After application, the product should be protected against direct sunlight, strong wind, high air temperature (above +35°C), bad weather conditions such as rain and freeze. In order to complete the hardening and reaction shortly after the application, the areas that contacts with skin should be cleaned with water and detergent.
- Immediately after the application, equipment should be cleaned with Thinner.

Technical Data

Technical Properties :	
General Information	
Chemical Structure	Epoxy Based
Color	Requested Ral colors
Mixture Density (A + B)	1,55 ± 0,05 (gr/ml) (1:1 mixture with filling: ~1.84)
Shelf Life	12 months in unopened original package
Package	20 kg set
Application Information	
Service Life	~ 30 minutes
Pot Life	40 min. (could be change depending on weather conditions)
Consumption	0,35 – 0,55 kg/m ² (Priming Coat)
Mixture Proportion	For Resin; 8,5 unit A / 1,5 unit B (by weight) For Thick Application in the Systems with Fillings; 8,5 unit A / 1,5 unit B / 5 -10 unit 0,1-0,3 mm Quartz Sand (by weight)
Full Strength	7 days
Performance Information	
Abrasion Resistance	~60-70 mg (CS 10/1000gr/1000 revolution) (DIN 53109)
Shore D Hardness	76 (DIN 53505)
Bending Resistance (7days)	> 30 N/mm ² (TS EN 196-1)
Compressive Resistance (7 days)	> 55 N/mm ² (TS EN 196-1)
Splice Strength to Concrete	> 4 N/mm ² (Break off from the concrete) (TS EN 4624)
Technical information is approximate value obtained from the Chelfix Construction Chemicals Laboratory works and are valid far the performance of the finished product in 27 days, which are obtained at + 20°C temperature and 50% relative air humidity rate.	